

Quick Setup Guide

Mamba 16X16 System with PR8E (you can use your own micpre also)

Setup Instruction:


Stage End [3U]

Stage End:

- Place the PR8Es and Mamba 16 in x 16 out boxes at the stage.
- Connect power for PR8Es and Mamba Stage box
- Connect CAT-5. You can have both or one cat-5. Install MC if need fiber
- Connect DB25 to DB25 from PR8E to channel 1-8 & 9-16 INPUT on Mamba
- Connect the DB25 - XLR M (16 ch) for returns from FoH
- Connect Microphones to PR8E inputs (front)
- Adjust the gain to good sound (gain could be low ¼ turn since A/D is Stage end)

FoH End:

- Place the FoH box (16 in x 16 out) near your mixer/board and connect power
- Connect the CAT-5(s) from Stage box or from MC if via Fiber
- Connect DB25 to XLR-M from Channel 1-8, 9-16 outputs on FoH box to mixer
- If you have selection, pls select Line level input than mic inputs on your mix board
- Connect the DB25 to XLR F for returns (16 ch) to Mamba input 1-16

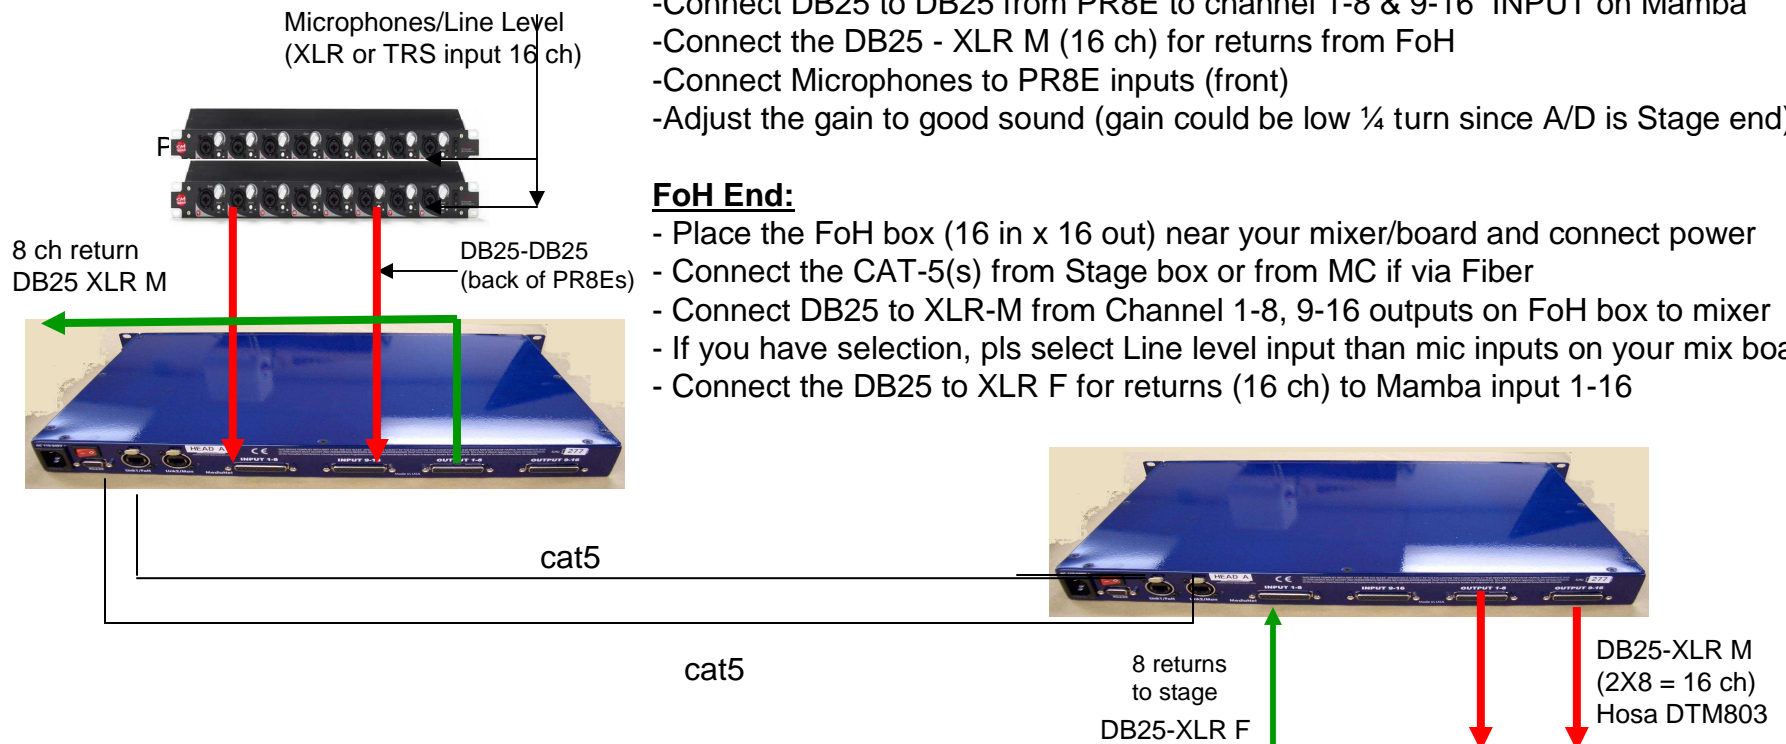

Call us at 408 434 9393 or email if you have any questions or problems.

FoH End [1U]

Mixing Console